

Industrial Pressure Transmitter

PR 124D-270 (Flush diaphragm)

Description

This series PR124D-270 with flush diaphragm is particularly suitable for the measurement of viscous fluids or media containing particulates that may clog the pressure connection of standard industrial transmitters. All wetted parts are made of stainless steel and are hermetically welded.




Application

- ◆ Mechanical engineering
- ◆ Hydraulics/Pneumatics
- ◆ General industrial applications
- ◆ Food & Beverage

Feature

- ◆ Pressure Range: 0....5 to 0....700bar
- ◆ Various output signal for option
- ◆ Flush diaphragm
- ◆ Excellent corrosion-proof capability
- ◆ Compact dimension, high quality

Dimension in mm

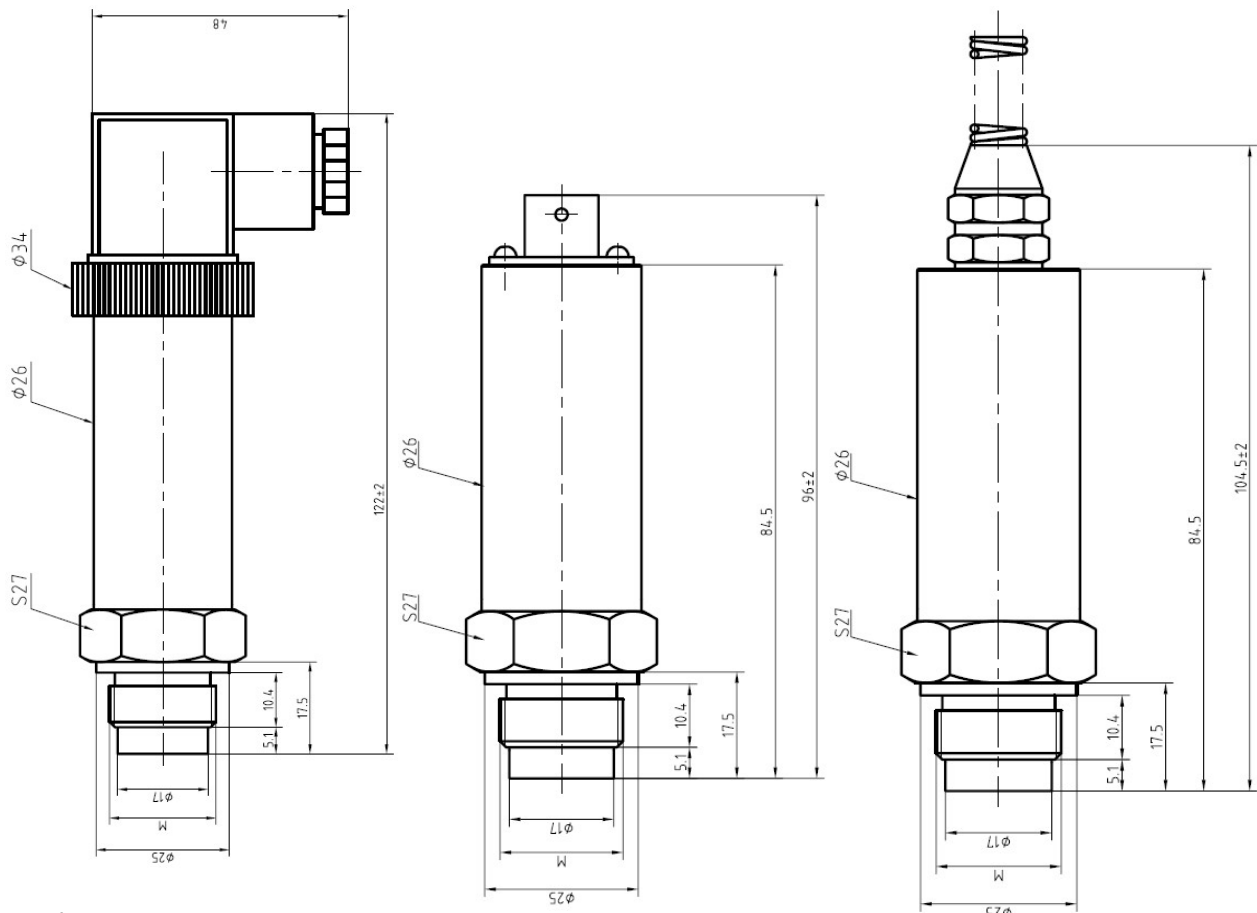


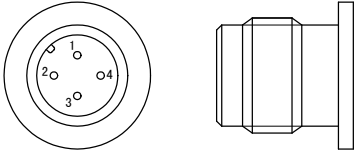
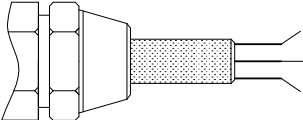
Remarks:

The dimensions only for you reference, and you can choose other electrical connector and process connector.

Specification

Range:	16bar, 20bar, 25bar, 40bar, 60bar, 100bar, 160bar, 250bar, 400bar, 600bar, 700bar;
Accuracy:	0.25%FS; 0.5%FS
Nonlinearity:	0.2%FS
Reliability:	0.05%FS
Output:	4-20mA (2 Wire), 0-5V; 0.5-4.5V
Input voltage:	24(12~36)VDC (Amplify signal); 5VDC
Work Temperature Range:	-40~80°C
Compensated temp range:	0~70°C
Overload pressure:	150%FS
Medium material:	stainless steel or Hardening Aluminum
Electric connection:	Hirschman(DIN), M12 & 4 PIN, Bendix connector, cable, (Customer design)
Process connection:	G1/2, 1/2BSP, 1/2NPT, M22 and etc

Electric Connection Code

Electric connector	2 Wire (4-20mA)			3 Wire (0-10V, 0-5V, 0.5-4.5V)		
Hirschman 	Pin	Function	Color	Pin	Function	Color
	1	E+/S+	Red	1	E+	Red
	2	E-/S-	Black	2	S+	Blue
	3	---	---	3	E-/S-	Blue
M12,4 Pin connector 	Pin	Function	Color	Pin	Function	Color
	1	E+	Red	1	E+	Red
	2	---	---	2	---	---
	3	S+	Black	3	S+	Blue
	4	---	---	4	E-/S-	White
Cable 	Function	Color	Function	Color		
	E+	Red	E+	Red		
	S+	Black	S+	Blue		
	---	---	E-/S-	White		

Ordering Guide

Model	Range(bar)	Output	Screw Thread	Electric connection	Other requirement
PR124D-270	---	---	---	---	---

Remarks:

Please connect the pressure transmitter with the opposite connection for difference electric connector. If the pressure transmitters with cable, please consult the right color.